




Picture



Features

- CE/CB Approved Emergency Light Model DT series
- Injection-molded plastic ABS housing
- Easy installation and maintenance
- Energy-saving LEDs with long operating lifespan of up to 100,000 hours
- Over-charged and over-discharged battery protections
- Test button to test emergency lighting set in normal operating
- LED indicator to monitor battery operating
- Lamp angle adjustment: Adjust the head to fit the building structure
- Emergency duration: 3 hours(one lamp) 1.5 hours (two lamps)
- Maximum 48 hours for full recharge t

Dimension (mm)

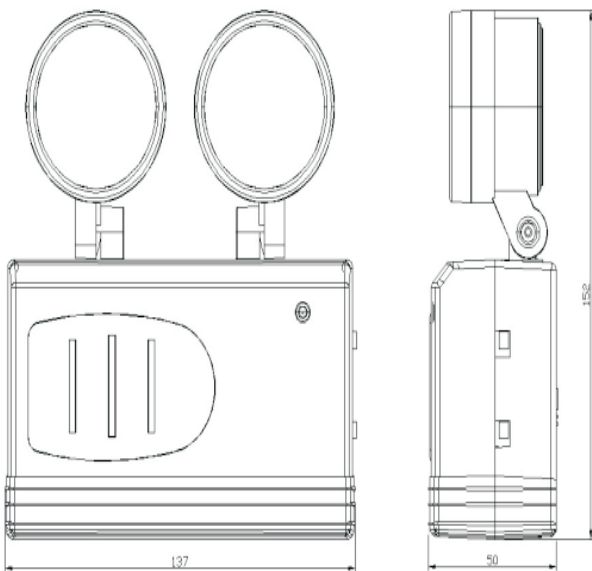

Specifications

Items	Units	Parameter
Input Voltage	V	AC110-240V
Source Type	-	SMD LED 5PCS+5PCS x0.2w
Luminous Flux	lm	200
Brightness	cd/m2	>15
Beam Angle	?	140
Body Materials	-	ABS
Life Time	Hr	50000
Work Temperature	°C	0~50
Emergency Time	Hr	3hrs (one lamp) 1.5 hrs (two lamps)
Consumption Power	W	4
Battery	-	3.7V1A Lithium battery
Emergency Convension Time	s	< 1
Charge time	Hr	48
Net Weight/pc (with battery)	g	250
One Pieces Packing	mm	142x54x185

Product Name	EMERGENCY LED LIGHTS DT Series
Model No.	DT-633
Main Specification	10x0.2W SMD LED ABS Housing 200lm
Product Size	137x50x152
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3*10 days
Remarks:	

Packing Information

Packing:	White box			
Carton:	L(cm)	W(cm)	H(cm)	
Carton Size:	44.2	28.8	34.1	
Carton CBM:	0.044M3			
Q'TY/INNER BOX:	1PCS			
Q'TY/CTN:	30PCS			
Gross Weight:	7.5KGS			
Net Weight:	8.5KGS			
Container Loading	1*20'	1*40'	1*40' HQ	
Q'TY(PCS):				

