




Picture



Dimension (mm)

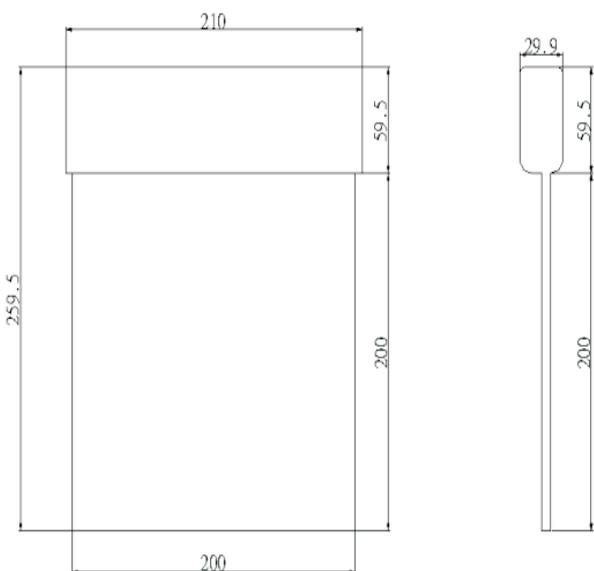

Features

- CE/CB Approved EXIT SIGNS Model DL series
- Aluminum base and Acrylic panel
- Fixing: by Wall Mounting or Ceiling hanging
- Single or double face
- Energy-saving LEDs with long operating lifespan of up to 100,000 hou
- Over-charged and over-discharged battery protections
- Test button to test emergency lighting set in normal operating
- LED indicator to monitor battery operating
- LED color: Red, Green, Blue, Pink, Purple..etc
- The words/signs can be made by engraving or by paste prin
- White/Green background or Transparency board are available
- Various of signage are available

Specifications

Items	Units	Parameter
Input Voltage	V	100-240VAC
Source Type	-	SMD LED 11*0.07W
Luminous Flux	lm	48.4
Display--sided	mm	200*200*5
Display material	-	Acrylic
LED Color	-	White
Beam Angle	?	140
Body Materials	-	Alloy
Life Time	Hr	>20000
Work Temperature	°C	0~50
Emergency Time	Hr	>1.5
Consumption Power	W	4
Battery	-	Ni-Cd 3.6V 600mAh
Emergency Convension Time	s	< 1
Charge time	Hr	48
One Pieces Packing	mm	260x40x265
Net Weight/pcs	g	600

Packing Information

Packing:	White box			
Carton:	L(cm)	W(cm)	H(cm)	
Carton Size:	51	53	28.5	
Carton CBM:	0.077M3			
Q'TY/INNER BOX:	1PCS			
Q'TY/CTN:	24PCS			
Gross Weight:	14.4KGS			
Net Weight:	14.9KGS			
Container Loading	1*20'	1*40'	1*40' HQ	
Q'TY(PCS):				

Product Name	EMERGENCY LED SIGNS DL Series
Model No.	DL-200
Main Specification	11x0.07W SMD LED , Aluminium Alloy Housing Material
Product Size	210x260x30
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

