


Picture



Dimension (mm)

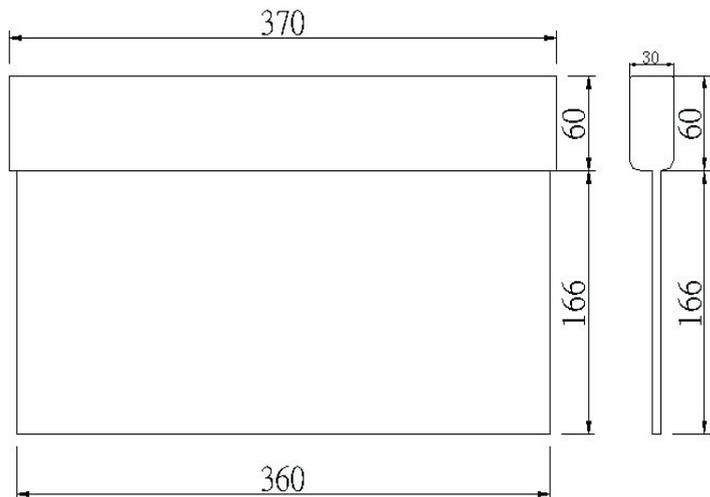

Features

- CE/CB Approved EXIT SIGNS Model DL series
- Aluminum base and Acrylic panel
- Fixing: by Wall Mounting or Ceiling hanging
- Single or double face
- Energy-saving LEDs with long operating lifespan of up to 100,000 hours
- Over-charged and over-discharged battery protections
- Test button to test emergency lighting set in normal operating
- LED indicator to monitor battery operating
- LED color: Red, Green, Blue, Pink, Purple..etc
- The words/signs can be made by engraving or by paste print
- White/Green background or Transparency board are available
- Various of signage are available

Specifications

Items	Units	Parameter
Input Voltage	V	100-240VAC
Source Type	-	SMD LED 18*0.07W
Luminous Flux	lm	79.2
Display--sided	mm	360*166*5
Display material	-	Acrylic
LED Color	-	White
Beam Angle	?	140
Body Materials	-	Alloy
Life Time	Hr	>20000
Work Temperature	°C	0~50
Emergency Time	Hr	>2
Consumption Power	W	4
Battery	-	Ni-Cd 3.6V 600mA
Emergency Convension Time	s	< 1
Charge time	Hr	48
One Pieces Packing	mm	420x185x40
Net Weight/pcs	g	800

Packing Information

Packing:		White box			
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	51		43		20.5
Carton CBM:	0.045M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	12PCS				
Gross Weight:	9.6KGS				
Net Weight:	10.1KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED SIGNS DL Series
Model No.	DL-366
Main Specification	26x0.07W SMD LED , Aluminium Alloy Housing Material
Product Size	370x216x30
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

