




### Picture



### Dimension (mm)

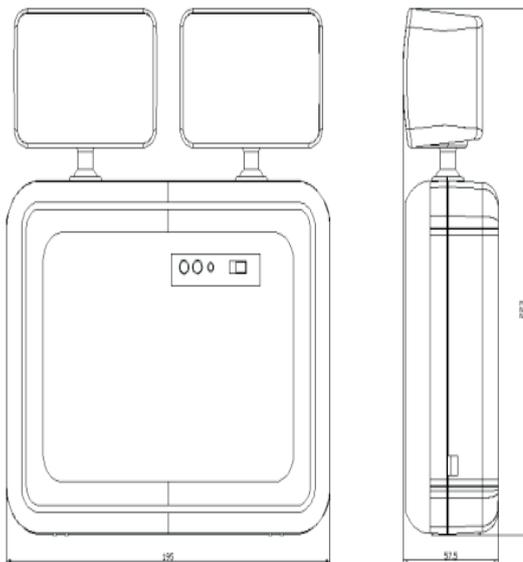

### Features

- CE/CB Approved Emergency Light Model DT series
- Injection-molded plastic ABS housing
- Easy installation and maintenance
- Energy-saving LEDs with long operating lifespan of up to 100,000 hours
- Over-charged and over-discharged battery protections
- Test button to test emergency lighting set in normal operating
- LED indicator to monitor battery operating
- Lamp angle adjustment: Adjust the head to fit the building structure
- Emergency duration: 3 hours
- Maximum 48 hours for full recharge t

### Specifications

Items	Units	Parameter
Input Voltage	V	AC100-240V
Source Type	-	SMD LED 48PCS
Luminous Flux	lm	1200
Brightness	cd/m <sup>2</sup>	>15
Beam Angle	?	120
Body Materials	-	ABS
Life Time	Hr	50000
Work Temperature	°C	0~50
Emergency Time	Hr	3
Consumption Power	W	4
Battery	-	Lead-Acid 6V4A
Emergency Convension Time	s	< 1
Charge time	Hr	48
Net Weight/pc (with battery)	g	1090
One Pieces Packing	mm	230x58x223

### Packing Information

Packing:	White box				
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	46		31.5		24.8
Carton CBM:	0.036M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	10PCS				
Gross Weight:	12.3KGS				
Net Weight:	12.8KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED LIGHTS DT Series
Model No.	DT-2112
Main Specification	48x0.2W SMD LED ABS Housing 1200lm
Product Size	195x57.5x223
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

