


Picture



Dimension (mm)

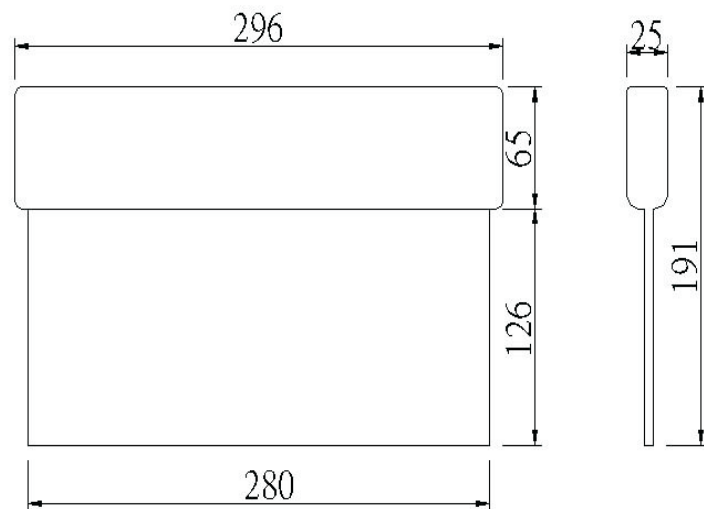

Features

CE/CB Approved EXIT SIGNS Model DL series
 Injection-molded plastic ABS housing
 Fixing: By Wall Mounting or Ceiling hanging
 Single or double face
 Energy-saving LEDs with long operating lifespan of up to 100,000 hours
 Over-charged and over-discharged battery protections
 Test button to test emergency lighting set in normal operating
 LED indicator to monitor battery operating
 LED color: Red, Green, Blue, Pink, Purple..etc
 The words/signs can be made by engraving or by paste printing
 White/Green background or Transparency board are available
 Various of signage are available

Specifications

Items	Units	Parameter
Input Voltage	V	100-240VAC
Source Type	-	SMD LED 13*0.07W
Luminous Flux	lm	57.2
Display-sided	mm	280x126x3
Display material	-	Acrylic
LED Color	-	White
Beam Angle	°	140
Body Materials	-	Plastic
Life Time	Hr	>20000
Work Temperature	°C	-10~50
Emergency Time	Hr	>2
Consumption Power	W	4
Battery	-	Ni-Cd 3.6V 600mAh
Emergency Conversion Time	s	< 1
Charge time	Hr	48
One Pieces Packing	mm	330x201x38
Net Weight/pcs	g	405

Packing Information

Packing:	White box				
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	47.6		33.2		20.6
Carton CBM:	0.033M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	12PCS				
Gross Weight:	4.86KGS				
Net Weight:	4.91KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED SIGNS DL Series
Model No.	DL-290
Main Specification	13x0.07W SMD LED ABS Housing
Product Size	296x191x25
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

