



Picture

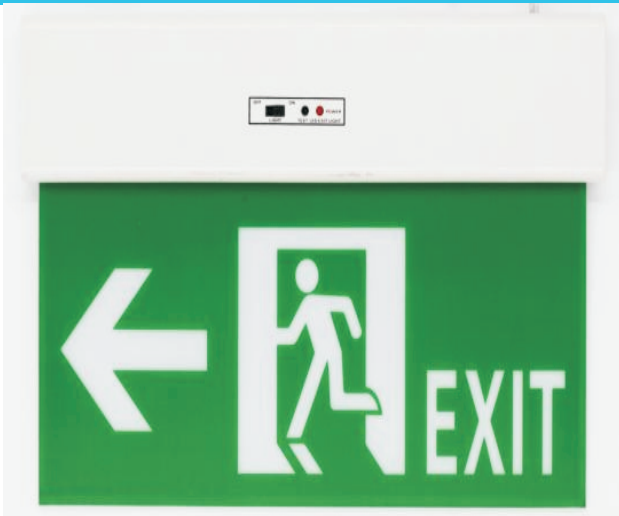

Dimension (mm)

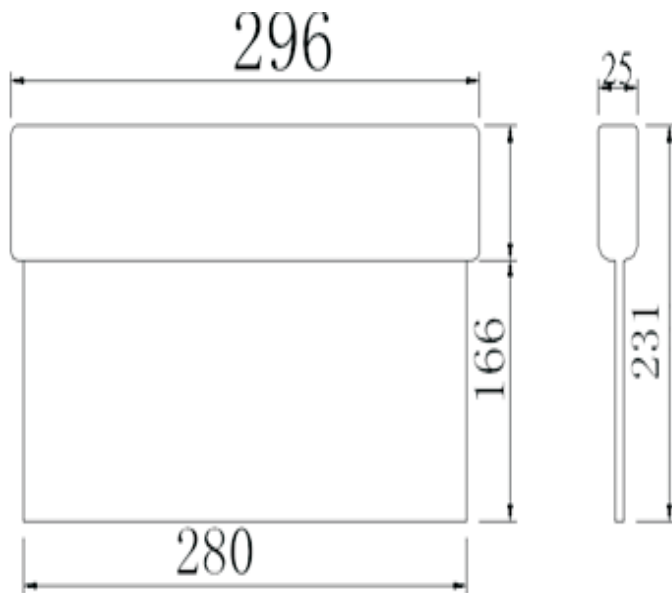

Features

CE/CB Approved EXIT SIGNS Model DL series  
 Injection-molded plastic ABS housing  
 Fixing: by Wall Mounting or Ceiling hanging  
 Single or double face  
 Energy-saving LEDs with long operating lifespan of up to 100,000 hours  
 Over-charged and over-discharged battery protections  
 Test button to test emergency lighting set in normal operating  
 LED indicator to monitor battery operating  
 LED color: Red, Green, Blue, Pink, Purple..etc  
 The words/signs can be made by engraving or by paste print  
 White/Green background or Transparency board are available  
 Various of signage are available

Specifications

Items	Units	Parameter
Input Voltage	V	100-240VAC
Source Type	-	SMD LED 13*0.07W
Luminous Flux	lm	57.2
Display--sided	mm	280x167x3
Display material	-	Acrylic
LED Color	-	White
Beam Angle	°	140
Body Materials	-	Plastic
Life Time	Hr	>20000
Work Temperature	°C	0~50
Emergency Time	Hr	>2
Consumption Power	W	4
Battery	-	Ni-Cd 3.6V 600mAh
Emergency Convension Time	s	< 1
Charge time	Hr	48
One Pieces Packing	mm	330x201x38
Net Weight/pcs	g	450

Packing Information

Packing:	White box				
Carton:	L(cm)		W(cm)		H(cm)
Carton Size:	47.6		33.2		20.6
Carton CBM:	0.033M3				
Q'TY/INNER BOX:	1PCS				
Q'TY/CTN:	12PCS				
Gross Weight:	5.4KGS				
Net Weight:	5.9KGS				
Container Loading	1*20'		1*40'		1*40' HQ
Q'TY(PCS):					

Product Name	EMERGENCY LED SIGNS DL Series
Model No.	DL-296
Main Specification	13x0.07W SMD LED ABS Housing
Product Size	396x231x25
MOQ	500PCS
Lead Time	35 days
Sample Delivery Time	3~10 days
Remarks:	

